

CONVEYOR AND PROCESS BELTS
TECHNICAL DATA SHEET
CODE NA-60
TYPE
2M12 U0-V10 RT FR
COMPOSITION

Conveying side	material	Polyvinyl chloride (PVC)		
	thickness	1,0 mm	0,039 in	
	cover finish	RT		
	colour	anthracite		
	coeff. of friction	HF		
Textile carcass	material	Polyester (PET)		
	no. of plies	2		
	type of weft	rigid		
Driving side	material	Fabric with Polyurethane (TPU)		
	thickness	--- mm	--- in	
	cover finish	LdB fabric		
	colour	grey		

TECHNICAL SPECIFICATIONS

Total thickness		2,7 mm	0,11 in.
Weight		2,9 kg/m ²	0,59 lbs./sq.ft
Elongation at 1%		12 N/mm	68,5 lbs./in.
Max. admitt. load		24 N/mm	137 lbs./in.
Temperature resistance ⁽¹⁾	min.	-10 °C	14 °F
	max.	+60 °C	140 °F

⁽¹⁾ use of the belt with limit values may reduce its life

Minimum pulley diameter ⁽²⁾			
■ knife edge		no	
■ bending pulley	60 mm		2,36 in.
■ counter-bending pulley	80 mm		3,15 in.


⁽²⁾ the above mentioned values depend on the type of CHIORINO joint recommended

Coefficient of friction of driving surface			
■ raw steel sheet	0,20 [-]		
■ laminated plastic/wood	0,25 [-]		
■ steel roller	0,20 [-]		
■ rubberized roller	0,30 [-]		

Max. production width	2000 mm	79 in.
-----------------------	---------	--------

JOINTING METHODS

See jointing data sheet

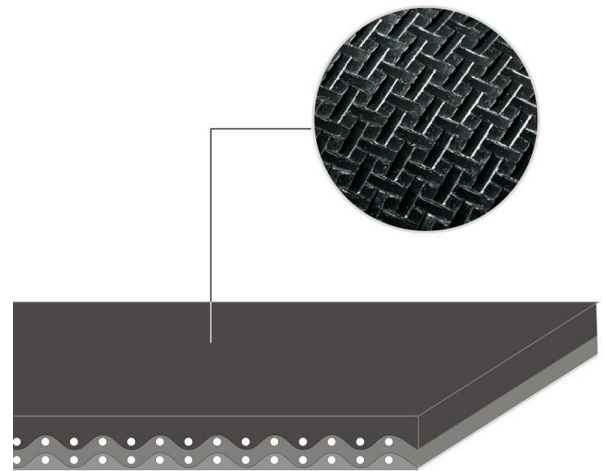NOTES

FEATURES

FDA conformity	no
USDA conformity	no
HACCP conformity (CEE 72/2002)	no
Flame Retardant (EN20340-ISO340)	yes
Humidity influence	no
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN 1718)	yes
Static conductivity (ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	no
Swan neck conveying	yes
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances (see chart of chemical resistances)	9

SUITABLE FOR

 Airports
 In-house handling

Issue: 10-10-2004


Date last modified: 29-05-2007

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA-60** TYPE **2M12 U0-V10 RT FR**

Recommended jointing procedure **SINGLE Z**

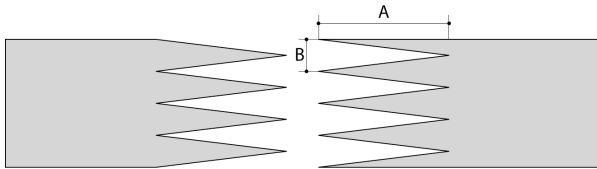

A	80mm
B	10mm

Other jointing methods can be used:
 DIAGONAL SINGLE Z
 SKIVED JOINT '2'
 DOUBLE Z
 STEP


Check our general catalogue to get further info on CHIORINO jointing methods.

• Pressing

Heating press **P \ PL \ PLS**


Press settings	
Upper platen temperature	170 °C
Lower platen temperature	170 °C
Temperature gauge setting	170 °C
Curing time in press	3 min.
Pressure	3 bar
Film	none
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.
3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

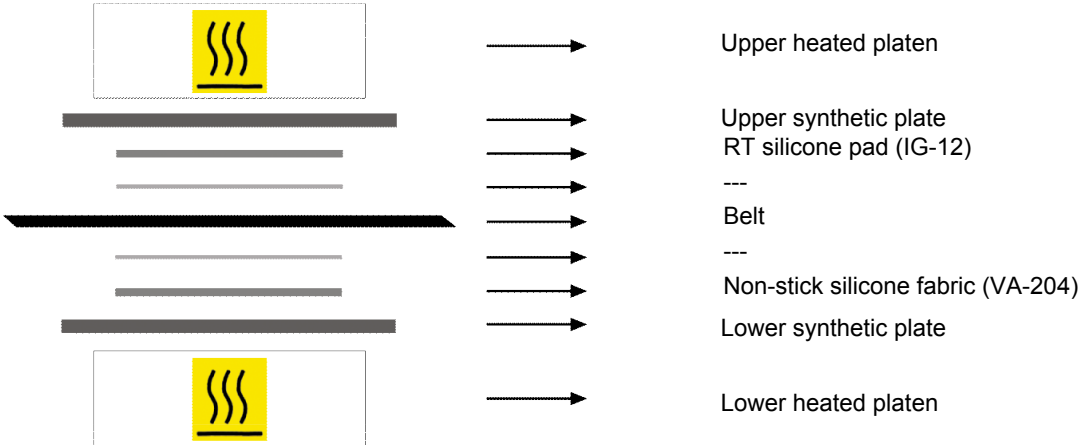

• Notes

Issued: 10-12-2005 Date last modified: 28-04-2006

DISCLAIMER
 The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.